

MISSOURI MISSOURI-KANSAS CITY BASIN

ELLIOT DAVIS LAKE DAM
HOWARD COUNTY, MISSOURI
MO 10129

AD A105306

PHASE 1 INSPECTION REPORT NATIONAL DAM SAFETY PROGRAM

UTIC FILE COPY





PREPARED BY: HOSKINS-WESTERN-SONDEREGGER, INC.

FOR: STATE OF MISSOURI

SEPTEMBER, 1978

DITTRIBUTION STATEMENT A

Approved for public release;
Clistribution Unlimited

81 10 7 068

SECURITY CLASSIFICATION OF THIS PAGE (Then Data Entered)

REPORT DOCUMENTATION		READ INSTRUCTIONS BEFORE COMPLETING FORM
REPORT NUMBER		3. RECIPIENT'S CATALOG NUMBER
	AD- A109	306
. TITLE (and Subtitle)	<u> </u>	S. TYPE OF REPORT & PERIOD COVERED
Phase I Dam Inspection Report	,-	
National Dam Safety Program		Final Report
Elliot Davis Lake Dam (MO 10129)	٠٠	6. PERSORMING ORG. DEFORT NUMBER
Howard County, Missouri		
· AUTHOR(s)		8. CONTRACT OR GRANT NUMBER(#)
Hoskins-Western-Sonderegger, Inc.		
		112 7
		DACW43-78-C-0155
PERFORMING ORGANIZATION NAME AND ADDRESS		10 PROGRAM ELEMENT PROJECT, TASK AREA & WORK UNIT NUMBERS
U.S. Army Engineer District, St.	Louis	1 1111
Dam Inventory and Inspection Sect		(1.748)
210 Tucker Blvd., North, St. Loui		
1. CONTROLLING OFFICE NAME AND ADDRESS		A REPORT DATE
U.S. Army Engineer District, St.		(/) September 1978
Dam Inventory and Inspection Sect		TO. NUMBER OF PAGES
210 Tucker Blvd., North, St. Loui		Approximately 45
4. MONITORING AGENCY NAME & ADDRESS(If differen	t from Controlling Office)	15. SECURITY CLASS. (of this report)
, National Dam Safety Program,	. Elliot	1
Davis Lake Dam (MO 10129), Mi	issouri -	UNCLASSIFIED
Kansas City Basin, Howard Co	ounty,	154. DECLASSIFICATION/DOWNGRADING SCHEDULE
Missouri. Phase I Inspection.	·	<u> </u>
7. DISTRIBUTION STATEMENT (of the abstract enforced		om Report)
Dam Safety, Lake, Dam Inspection,)
This report was prepared under the Non-Federal Dams. This report as respect to safety, based on avail determine if the dam poses hazard	e National Progr sesses the gener able data and on	am of Inspection of all condition of the dam with visual inspection, to
D 1 JAN 73 1473 EDITION OF ! NOV 65 IS 0850	LETE 3 / 1//	UNCLASSIFIED OF THIS PAGE (When Dota Brite

「はいいのか、いか」は、大なはななななななななななななないがらい、

The second secon



DEPARTMENT OF THE ARMY ST. LOUIS DISTRICT, CORPS OF ENGINEERS 210 NORTH 12TH STREET ST. LOUIS, MISSOURI 63101

SUBJECT: Elliot Davis Lake Dam Phase I Inspection Report

This report presents the results of field inspection and evaluation of the Elliot Davis Lake dam:

It was prepared under the National Program of Inspection of Non-Federal Dams

This dam has been classified as unsafe, non-emergency by the St. Louis District as a result of the application of the following criteria:

1) Spillway will not pass 50 percent of the Probable Maximum Flood

2) Overtopping could result in dam failure.

 Dam failure significantly increases the hazard to loss of life downstream

SIGNED	12 MAR 1979
Chief, Engineering Division SIGNED	Date
APPROVED BY: Colonel, CE, District Engineer	12 bate 1979
Accession For MTIS GRA&I DTIC TAB Unannounced Justification	
Distribution/ Availability Codes Avail and/or Dist Special	S 00T 9 1981

PHASE I REPORT

NATIONAL DAM SAFETY PROGRAM

Name of Dam State Located County Located Stream Date of

Elliot Davis Lake Dam Missouri Howard County

Tributary to Adams Fork September 14, 1978

Inspection

Elliot Davis Lake Dam was inspected by an interdisciplinary team of engineers from Hoskins-Western-Sonderegger, Inc. The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and visual inspection, in order to determine if the dam poses hazards to human life or property.

The guidelines used in the assessment were furnished by the Department of the Army, Office of the Chief of Engineers and developed with the help of several Federal and State agencies, professional engineering organizations, and private engineers. Based on these guidelines, this dam is classified as an intermediate size dam with a high downstream hazard potential. Failure would threaten life and property. The estimated damage zone extends three miles downstream of the dam. Within the first two miles downstream of the dam are three to four houses, one county road, one state road and one railroad crossing.

Our inspection and evaluation indicates that the spillway does not meet the criteria set forth in the guidelines for a dam having the above size and hazard potential. The spillway will not pass the flood expected to be exceeded once in one hundred years without overtopping the dam. The spillway will pass 17% of the Probable Maximum Flood without overtopping the dam. The Probable Maximum Flood (PMF) is defined as the flood that may be expected from the most severe combination of critical meteorologic and hydrologic conditions that are reasonably possible in the region.

Seepage and stability analyses comparable to the requirements of the "Recommended Guidelines for Safety Inspection of Dams" were not available, which is considered a deficiency. These analyses should be obtained in the future.

Other deficiencies visually observed by the inspection team were willows growing along the waterline on upstream slope, seepage emerging from the toe of the dam near the right abutment, water ponded downstream of the dam in the area of the seep, dense growth of grass and rushes enclosing the concrete weir inlet to the spillway, erosion around the outlet end of the spillway, a reported break in the spillway pipe, and the lack of an emergency spillway.

Several items of preventive maintenance need to be initiated by the owner. These are described in detail in the body of the report.

Harold P. Hoskins, P.E. Hoskins-Western-Sonderegger, Inc. Lincoln, Nebraska



PHOTO NO. 1 OVERVIEW TAKEN FROM RIGHT SIDE

PHASE I INSPECTION REPORT NATIONAL DAM SAFETY PROGRAM ELLIOT DAVIS LAKE DAM ID NO. MO. 10129

TABLE OF CONTENTS

Paragraph No.	<u>Title</u>	Page No.
	SECTION 1 - PROJECT INFORMATION	
1.1	General	1
1.2 1.3	Description of Project Pertinent Data	1 2
1.3	Pertinent Data	2
	SECTION 2 - ENGINEERING DATA	
2.1	Design	4
2.2	Construction ·	4 4
2.3	Operation	4
2.4	Evaluation	7
	SECTION 3 - VISUAL INSPECTION	
3.1	Findings	5
3.2	Evaluation	6
	SECTION 4 - OPERATIONAL PROCEDURES	
4.1	Procedures	7
4.2	Maintenance of Dam	7
4.3	Maintenance of Operating Facilities	7
4.4 4.5	Description of Any Warning System in Effect Evaluation	7 7 7
4.5	EAG (AG C) OII	•
	SECTION 5 - HYDRAULIC/HYDROLOGIC	
5.1	Evaluation of Features	8
	SECTION 6 - STRUCTURAL STABILITY	
6.1	Evaluation of Structural Stability	9
	SECTION 7 - ASSESSMENT/REMEDIAL MEASURES	
7.1	Dam Assessment	10
7.2	Remedial Measures	10

APPENDIX A - MAPS

Plate 1 Plate 2 Vicinity Topography Location Map

APPENDIX B - PHOTOGRAPHS

Photographs of Dam and Lake (No. 2 through No. 11)

APPENDIX C - PLAN, SECTION AND PROFILE

Phase I

Plan, Section and Profile

APPENDIX D - HYDROLOGIC COMPUTATIONS

Plate D1

Sheets 1, 2 and 3 of 16 Sheets 4 and 5 of 16 Sheet 6 of 16 Sheets 7, 8 and 9 of 16 Sheets 10 and 11 of 16 Sheets 12, 13 and 14 of 16 Sheet 15 of 16 Sheet 16 of 16 Inflow Hydrographs

Computer Input (PMF and 0.5 PMF)
Computer Output (PMF)
Computer Output (0.5 PMF)
Computer Input (100 Year)
Computer Output (100 Year)
Principal Spillway Flow Computations
Flow Computations Over Dam
Outfall Rating Computations

SECTION 1 - PROJECT INFORMATION

1.1 GENERAL

- a. Authority. The National Dam Inspection Act, Public Law 92-367, authorized the Secretary of the Army, through the Corps of Engineers, to initiate a program of safety inspection of dams throughout the United States. Pursuant to the above, the St. Louis District, Corps of Engineers, Dictrict Engineer directed that a safety inspection of the Elliot Davis Lake Dam be made.
- b. Purpose of Inspection. The purpose of the inspection was to make an assessment of the general condition of the dam with respect to safety, based upon available data and visual inspection, in order to determine if the dam poses hazards to human life or property.
- c. Evaluation Criteria. Criteria used to evaluate the dam were furnished by the Department of the Army, Office of the Chief of Engineers, in "Recommended Guidelines for Safety Inspection of Dams." These guidelines were developed with the help of several Federal agencies and many State agencies, professional engineering organizations, and private engineers.

1.2 DESCRIPTION OF PROJECT

- a. Description of Dam and Appurtenances.
 - (1) This dam is an earth fill about 1050 feet in length and 42 feet in height. Topography around the dam is moderately steep. Materials on the slopes consist of loess or reworked loess soils underlain by limestone. Surface materials in the dam are lean clays (CL).
 - (2) The spillway consists of a 30 inch diameter corrugated metal pipe (CMP) riser connected to a 12 inch CMP outlet passing through the dam and/or abutment on the right (south) end.
 - (3) A 4 inch steel pipe with a valve at the downstream end passes through the base of the dam at about centerline station 7+00.
 - (4) Pertinent physical data are given in Paragraph 1.3 below.
- b. Location. The dam is located in the central portion of Howard County, Missouri, as shown on Plate 2. The dam is shown on Plate 1 in the SW½ of Section 10, T50N, R16W. The lake formed by the dam is shown in the W½ of Section 10 and the E½ of Section 9, T50N, R16W.

- c. <u>Size Classification</u>. Criteria for determining the size classification of dams and impoundments are presented in the guidelines referenced in paragraph 1.1c above. Based on these criteria, this dam and impoundment is in the intermediate size category.
- d. Hazard Classification. Guidelines for determining hazard classification are presented in the same guidelines as referenced in paragraph c above. Based on referenced guidelines, this dam is in the High Hazard Classification. The estimated damage zone extends three miles downstream of the dam. Within the first two miles downstream of the dam are three to four houses, one county road, one state road and one railroad crossing.
- e. Ownership. This dam is owned by Westown Lake, Inc., 124 East Morrison, Fayette, Missouri 65248. Attention: John Edwards.
- f. Purpose of Dam. The dam forms a 47 acre \pm recreational lake.
- g. <u>Design and Construction History</u>. No design or construction data were available. The dam was constructed in 1962 for Mr. Elliot Davis. It was reported that materials for the dam came from the reservoir area, that it has a foundation cut off and that a sheepsfoot roller was used to compact the fill.
- h. Normal Operating Procedure. There are no controlled outlet works for this dam. No information was available on the fluctuation of the lake level. It was reported that flow passed over the top of the dam for about 2 hours in 1973. This overtopping resulted from a 9 to 12 inch rain in the area.

1.3 PERTINENT DATA

- a. Drainage Area 0.55 sq. mi. (351.3 acres).
- b. Discharge at Damsite.
 - (1) All discharge at the damsite is through a 30 inch CMP drop inlet pipe (capped with a 30 inch square concrete weir) with a 12 inch CMP conduit outlet pipe.
 - (2) Estimated flood at damsite 300 c.f.s.± in 1973; based on estimated depths furnished by owner over the low portions at the dam and using current rating.

- (3) The principal spillway capacity varies from 0 c.f.s. at elevation 699 ft. to 7 c.f.s. at elevation 701.2 feet (low point on dam crest and maximum pool elevation).
- (4) There is no emergency spillway.

- c. Elevations (Feet above M.S.L.)
 - Top of dam (low point) 701.2; normal 703.
 - (2) Principal spillway crest - 699.0.
 - (3) Emergency spillway crest - None.
 - Streambed at centerline of dam 660±.
 - (5) Maximum tailwater unknown.
- d. Reservoir. Length of maximum pool 3,600 ft.±.
- e. Storage (Acre-feet).
 - Top of dam (701.2 feet) 895.
 - Normal pool (699.0 feet) 778.
- f. Reservoir Surface (Acres)
 - Top of dam $51\pm$.
 - (2) Spillway crest 47±.
- Dam
 - Type Earth embankment.
 - Length 1050 feet±.
 - (3)Height - 42 feet±.
 - Top width 18 feet.
 - Side Slopes.
 - Downstream 3.1H to 3.5H on 1V (measured)
 - (a) Downstream 3.1H to 3.5H on 1V (measured)(b) Upstream Exposed section 3.8H on 1V (measured) Reported to be 4H on 1V
 - Zoning Unknown.
 - Impervious Core Unknown.
 - Cutoff Reported as present. (8)
 - Grout curtain unknown.
 - (10) Wave Protection Riprap, limestone rock.
- h. Diversion and regulation None
- i. Spillway
 - (1) Principal
 - (a) Type 30 inch CMP drop inlet with concrete weir cap and 12 inch CMP outlet conduit.
 - (b) Size of weir 30 inch square opening.
 - (c) Crest elevation 699.0 feet, M.S.L.
 - (2) Emergency None.
- Regulating Outlet None.

SECTION 2 - ENGINEERING DATA

2.1 DESIGN

No design data were available.

2.2 CONSTRUCTION

The dam was constructed in 1962. No construction data were available. It was reported that the embankment was compacted with sheepsfoot rollers.

2.3 OPERATION

No data on operation of the spillway were available. It was reported that the dam overtopped in 1973.

2.4 EVALUATION

- a. Availability. No data were available.
- b. Seepage and Stability Analyses. Seepage and stability analyses comparable to the requirements of the "Recommended Guidelines for Safety Inspection of Dams" were not available which is considered a deficiency. These seepage and stability analyses should be performed for appropriate loading conditions (including earthquake loads) and made a matter of record.

SECTION 3 - VISUAL INSPECTION

3.1 FINDINGS

- a. <u>General</u>. A visual inspection of Davis Lake Dam was made on September 14, 1978. Engineers from Hoskins-Western-Sonderegger, Inc., Lincoln, Nebraska making the inspection were: Rey Decker, Geology and Soil Mechanics; Garold Ulmer, Civil Engineer; Richard Walker and Gordon Jamison, Hydrology. Specific observations are discussed below.
- b. <u>Dam</u>. Rough measurements along the crest of the dam indicate that the ends of the dam are 1 to 2 feet lower in elevation than the central section of the dam.

The upstream slope appears to be quite flat (measured at 3.8H on 1V) and is covered from the waterline down with durable limestone riprap up to 36 inches in diameter. No bedding material was noted under the riprap. A few small willows were observed along the waterline. No excessive erosion was noted on the upstream slope. The downstream slope is covered with a dense growth of grasses and clover that made it difficult to evaluate surface conditions. The abutments are mantled with silty clay (CL) soils. However, limestone bedrock outcrops at and above the water level toward the upper end of the lake. No animal burrows, cracks, slides or abnormal deformations were noted on the embankment or abutments.

A fairly large seepy area, approximately 20x75 feet in size, was observed at the downstream toe of the dam near the right abutment-embankment trough downstream from about center line station 8+50 (see Appendix C for stationing). Water was ponded in the lower part (approximately 20x20 feet) of this area and the ground surface was very unstable.

c. Appurtenant Structures. The principal spillway consists of a 30 inch corrugated metal riser connected to a 12 inch CMP outlet passing through the dam or abutment at about £ station 10+50. A dense growth of tall grass and rushes encloses the screen around the concrete weir inlet to the spillway. The spillway outlets on the right abutment about 13 feet above the elevation of the valley floor. A hole about 20 feet in diameter has eroded around the outlet end and exposed about 4 feet of the spillway pipe. The exposed c/m pipe appeared to be in good condition. However, it was reported by one of the owners that the 12 inch spillway conduit pipe is broken and leaks. Leakage from the spillway outlet could contribute to the seep area along the toe of the dam.

month disease, and the same profession of the first of the

The water level in the reservoir was at the elevation of the spillway weir crest at the time of inspection with a slight trickle of water discharging from the spillway outlet.

A 4 inch steel pipeline passes through the base of the dam at about center line station 7+00. This pipeline outlets near the downstream toe of the dam and is controlled by a valve at the outlet end. It was reported that this valve is opened once or twice each year to be sure that it is operable.

- d. Reservoir Area. No wave wash, excessive erosion or slides were noted along the shoreline of the reservoir.
- e. <u>Downstream Channel</u>. The spillway outlets onto a well vegetated slope and thence into a wooded channel approximately 400 feet downstream from the dam.
- f. Downstream Hazards. Downstream hazards are described in Section 5. In addition to those in Section 5, it was noted that a sewage lagoon approximately 250 x 50 feet is located in the valley floor downstream from about C station 7+00. It was reported that additional lagoons are to be constructed adjacent to the present lagoon.

3.2 EVALUATION

The erosion around and leakage in the spillway outlet could lead to potential of failure if left uncorrected. Additional studies would be required to determine the affect of seepage on stability of the dam. The flat side slopes on this embankment would ordinarily provide adequate safety against shear failures for a dam of this height.

SECTION 4 - OPERATIONAL PROCEDURES

4.1 PROCEDURES

There are no controlled outlet works for this dam. It was reported that water flowed over the top of the dam in 1973.

4.2 MAINTENANCE

The growth of small trees and shrubs on the upstream face of the dam, heavy grass growth on the downstream slope, erosion at the spillway outlet, and reported leaks in the spillway conduit indicate the lack of regular maintenance.

4.3 MAINTENANCE AND OPERATING FACILITIES

No operating facilities exist at this dam.

4.4 DESCRIPTION OF ANY WARNING SYSTEM IN EFFECT

The inspection team is not aware of any warning system in effect for this dam.

4.5 EVALUATION

A potential of failure may result if deficiencies in the spillway and control of tree growth on the upstream face are not corrected.

SECTION 5 - HYDRAULIC/HYDROLOGIC

5.1 EVALUATION OF FEATURES

- a. Design Data. No design data were found for this dam.
- b. Experience Data. The drainage area, lake surface area, and elevation-storage data were developed from the USGS Fayette, Mo. 7 1/2 minute topographic quadrangle map. The hydraulic computations for spillway and dam overtopping discharge ratings were based on data obtained from surveys made at the time of the field inspection.

c. Visual Observations.

- (1) The principal spillway outlet channel is eroded and the approach to the weir is blocked by heavy grass matted against the protective fence. It was also reported that the spillway outlet conduit is broken and leaks.
- d. Overtopping Potential. The principal spillway is too small to pass either the 100-year or one-half probable maximum flood without overtopping. The principal spillway will pass the 0.17 PMF without overtopping the dam. The results of the routings through the reservoir are tabulated in regards to the following conditions.

Frequency	Peak Inflow Discharge c.f.s.	Peak Outflow Discharge c.f.s.	Maximum Pool Elevation	Freeboard Top of Dam Min. Elev. 701.2	Time Dam Overtopping Hrs.
100-Yr.	690	110	701.8	-0.6	14+
1/2 PMF	1660	1400	702.9	-1.7	14+
PMF	3340	3220	703.5	-2.3	15+
0.17 PMF	530	9	701.2	0	-

According to the recommended guidelines from the Department of the Army, Office of the Chief of Engineers, this dam is classified as having a high hazard rating and a intermediate size. Therefore, the PMF is the test for the adequacy of the dam and its spillways.

CONTRACTOR OF THE PROPERTY AND ADDRESS OF THE PARTY OF TH

The St. Louis District, Corps of Engineers, in a letter dated 11 August, 1978 has estimated the damage zone as extending three miles downstream from the dam. Within the damage zone are three to four homes, one county road, one state highway and one rail-road crossing.

AND REAL PROPERTY OF THE PARTY OF THE PARTY

SECTION 6 - STRUCTURAL STABILITY

6.1 EVALUATION OF STRUCTURAL STABILITY

- a. <u>Visual Observations</u>. Visual observations of features which could adversely affect structural stability of this dam are discussed in Section 3.
- b. <u>Design and Construction Data</u>. No data were available.
- c. Operating Records. There are no controlled outlets for this dam.
- d. <u>Post Construction Changes</u>. The inspection team is not aware of any post construction changes on this dam.
- e. <u>Seismic Stability</u>. This dam is located in Seismic Zone 1. An earthquake of this magnitude is not expected to cause a structural failure of this dam.

SECTION 7 - ASSESSMENT/REMEDIAL MEASURES

7.1 DAM ASSESSMENT

- a. Safety. The erosion and reported leakage associated with the spillway outlet should be corrected. The flatter than normal embankment slopes should provide adequate safety against shear failures in a dam of this height. However, additional studies would be required to determine the effects of the observed seepage on the stability of the dam. The floods caused by the 100-year storm will overtop the dam to a depth of 0.6 foot and the 0.5 probable maximum flood will overtop the dam to a depth of 1.7 feet.
- b. Adequacy of Information. Due to the lack of engineering data, the conclusions in this report are based upon performance history and visual observations. These data are considered sufficient to support these conclusions. Neither seepage nor stability analysis were found which is a deficiency that should be corrected in the future.
- c. <u>Urgency</u>. The remedial measures recommended in paragraph 7.2 should be accomplished in the near future. If the deficiencies in the present spillway listed in paragraph "a" are not corrected, they could ultimately lead to potential of failure.
- d. <u>Necessity for Phase II</u>. Phase II investigations do not seem to be necessary. However, additional engineering data should be obtained at the owner's expense to evaluate the effects of seepage on the stability of the dam.
- e. <u>Seismic Stability</u>. An earthquake of the magnitude expected in this area should not be hazardous to this dam.

7.2 REMEDIAL MEASURES

a. Alternatives.

- (1) Raising the low sections on each end of the dam up to the normal crest elevation of 703 would prevent overtopping by the 0.5 PMF.
- (2) An emergency spillway should be constructed to pass the probable maximum flood without overtopping the dam.
- (3) If the present spillway is to remain in service, the outlet pipe should be repaired. The erosional damage at the outlet end of the spillway should be corrected and measures taken to control erosion from future spillway discharges.


- (4) Seepage and stability analyses comparable to the requirements of the guidelines should be performed.
- (5) The services of an engineer experienced in the design of dams should be obtained to evaluate seepage and stability conditions and to design the new spillway and/or modifications to the embankment that are required to prevent overtopping of the dam and erosion from spillway discharges.


b. 0 & M Maintenance and Procedures.

- (1) The deficiencies in the present spillway and the tree growth on the upstream face of the dam should be corrected.
- (2) Mowing the downstream slope of the dam would allow better evaluation of downstream slope conditions.
- (3) A schedule of regular inspection and maintenance should be initiated. Maintenance measures should include control of vegetation on the structure and of excessive erosion in the present and/or new spillway.

APPENDIX A MAPS

I

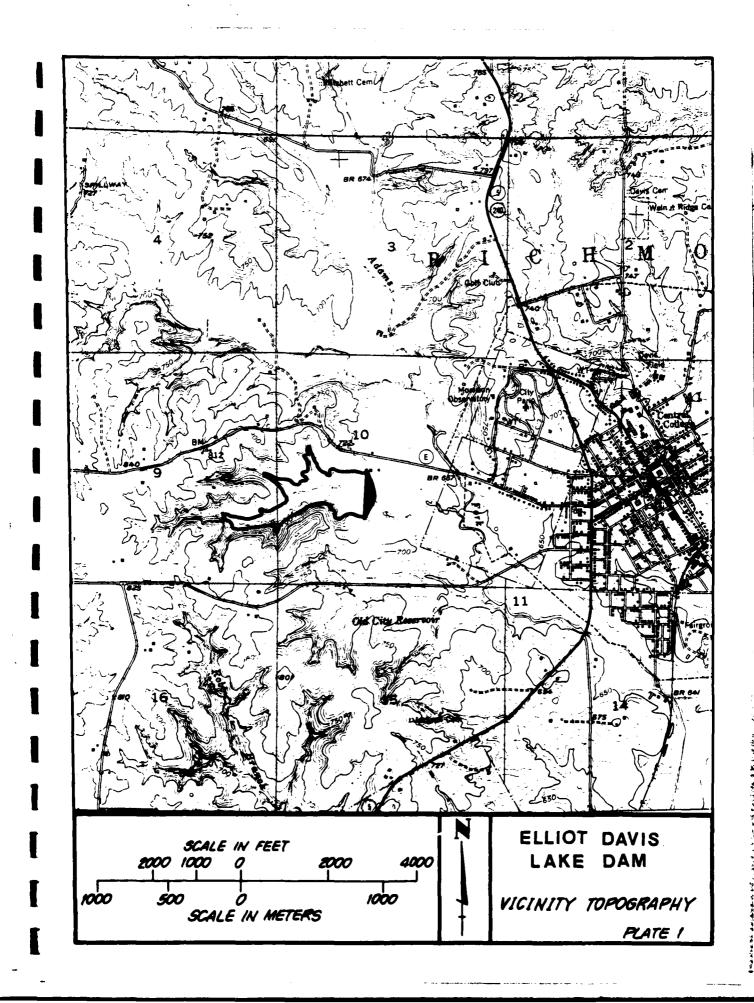

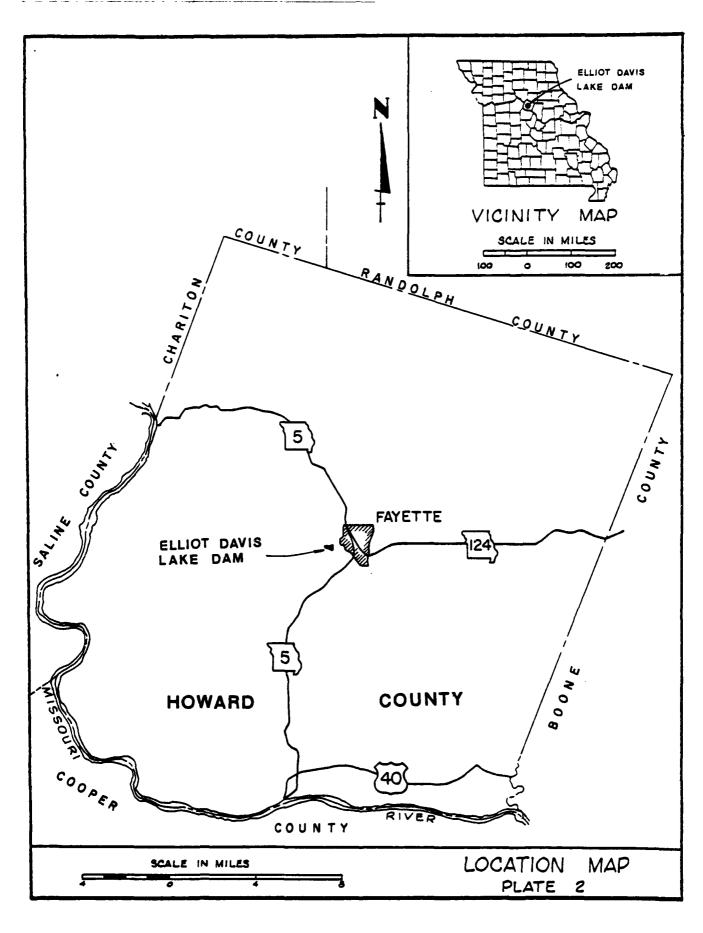

APPENDIX B PHOTOGRAPHS



PHOTO NO. 2 SEEPAGE SPRING OPPOSITE STA. 8+85



PHOTO NO. 3 OVERVIEW OF DAM TAKEN UPSTREAM FROM RIGHT ABUTMENT.

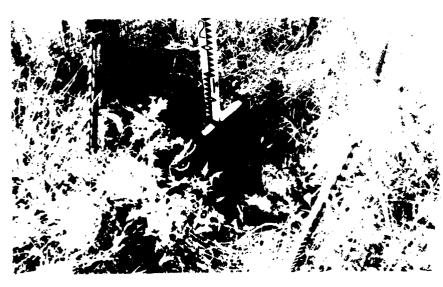


PHOTO NO. 4 PRINCIPAL SPILLWAY INLET.



PHOTO NO. 5



PHOTO NO. 6 OUTLET END OF PRINCIPAL SPILLWAY



PHOTO NO. 7
OUTLET END 4" PIPE
WITH VALVE CONTROL



PHOTO NO. 8 LOOKING DOWNSTREAM FROM CENTERLINE STATION 7+00



PHOTO NO. 9 LOOKING UPSTREAM ACROSS RESERVOIR FROM STATION 7+00.






PHOTO NO. 10 UPSTREAM SLOPE FROM LEFT ABUTMENT.



PHOTO NO. 11 CREST OF DAM TAKEN FROM LEFT ABUTMENT

こうしょうしょう とうかん からない からない ないない かんかん かっしょうしょう しゅうしゅん

APPENDIX C PLAN, SECTION AND PROFILE

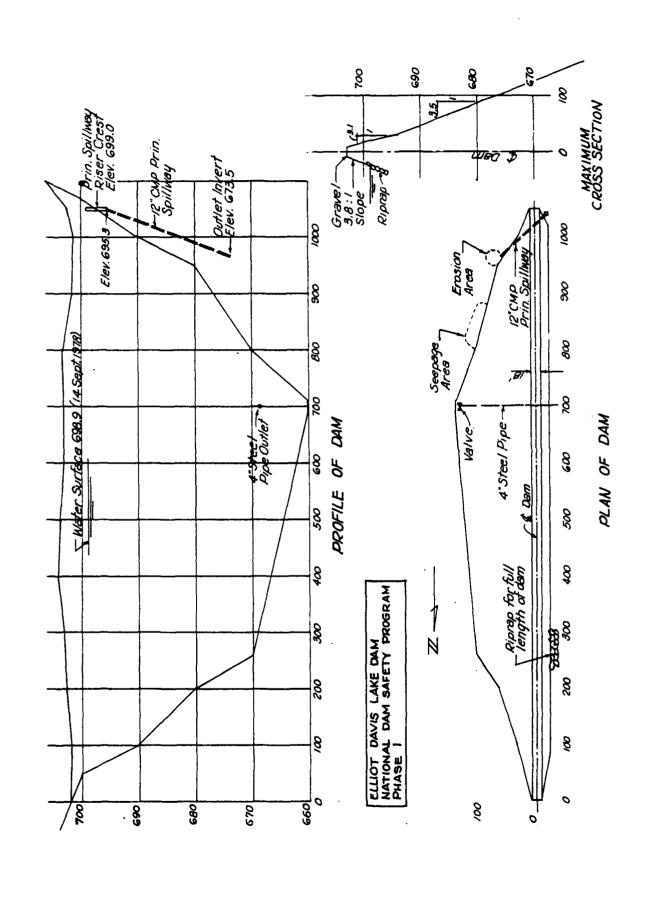

APPENDIX D HYDROLOGIC COMPUTATIONS

HYDROLOGIC COMPUTATIONS

- 1. The Mockes dimensionless standard curvalinear unit hydrograph and the SCS TR-20 program were used to develop the inflow hydrographs (see Plate D1). The inflow hydrograph for the 100-year flood was generated by the consultant using the TR-20 program.
- a. Six-hour, twelve-hour, and twenty-four hour 100-year rainfall for the dam location was taken from NOAA Technical Paper 40. The 24-hour probable maximum precipitation was taken from the curves of Hydrometeorological Report No. 33 and current Corps of Engineers and St. Louis District policy and guidance for hydraulics and hydrology.
 - b. Drainage area = 0.55 square mile.
 - c. Time of concentration of runoff = 31 minutes.
- d. The antecedent storm conditions were heavy rainfall and low temperatures which occurred on the previous 5 days (SCS AMCIII). The initial pool elevation was assumed at the crest of the principal spillway.
- e. The total 24-hour storm duration losses for the 100-year storm were 1.14 inches. The total losses for the 24-hour duration 1/2 PMF storm were 1.23 inches. The total losses for the PMF storm were 1.27 inches. These data are based on use of soils groups B and D; grazing, homesites, and woodlands weighted to produce SCS input runoff curve No. 79 from SCS AMCII converted by TR-20 to computed curve No. 90.4 SCS AMCIII.
 - f. Average soil loss rates = 0.05 inch per hour approximately.
- 2. The weir/drop-inlet discharge ratings were developed using standard formulas. The flows over the dam crest were based on the broad-crested weir equation $Q = CLH \ 3/2$, where H is the head on the dam crest; the coefficient C, which varies with head, was taken from the USGS publication "TWRI, Book 3, Chapter 5, Measurement of Peak Discharge at Dams by Indirect Methods" (C values varied from 2.52 to 3.04). Sample calculations are attached.
- 3. Floods were routed through the reservoir using the TR-20 program to determine the capabilities of the spillway and dam embankment crest. The unit hydrograph computation duration interval is computed as 0.17 Tc by the TR-20 program. Copies of the input-output data from the TR-20 program used to develope the hydrographs for the PMF, 0.5 PMF, and 100-year flood are attached. The storm rainfall patterns, inflow hydrographs and routed outflow hydrographs are shown on Plate D1.

HYDROLOGY PROGRAM	FOR 18M	1130 - OT DAVI	DATED JE	JULY, 1968			TP-20 (00:1446)
CONTRO SP-ELLI	CARU FOAVIS D	A.	OFENA				
	VELOCITY	INCREMENT	NT = 0	.200			
	000000000000000000000000000000000000000	しゅうふててきむ	30,726,726	000000000000000000000000000000000000000	000000000000000000000000000000000000000	0.146,400 0.146,400 0.146,400 0.146,400 0.146,000 0.146,000	
	**************************************	********	00000000000000000000000000000000000000	**************************************	**************************************	06000000 00000000 0000000	
	4	•	}) - -		
NO. 1							
		FLEVATI 699.0	1000 0001	SCHARGE 0.0000	Storage 777,9998		
ONLESS HY	HYDROGRAPH -	DELTA	T =484.	00			
	000000000000000000000000000000000000000	00000000000000	00000000000000000000000000000000000000	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0.1300 0.3500 0.3500 0.3500 0.0174 0.00150 0.00150 0.00150	0.31 c 0 0.32 c 0 0.32 c 0 0.33 c 0.33 c 0 0.33 c 0.33 c 0 0.33 c 0.33 c 0	
TABLE N	NO. 1 T	IME INC	REMENT	= 0.50			
	000000000000000000000000000000000000000	000000000	00000000000000000000000000000000000000	000000000000000000000000000000000000000	00000000000000000000000000000000000000	00000000000000000000000000000000000000	
TABLE N	NO. 2 T	IME INC	REMERIT	= 0.02			
	000000000000000000000000000000000000000	000000000	07000000000000000000000000000000000000	00000000000000000000000000000000000000	0.000000000000000000000000000000000000	0.000000000000000000000000000000000000	
TABLE N	NO. 3 T	IME INC	REMENT	0.50			
	000000	0.0	700	0.1400	0,2106	0.22.00	

一日の一日のことのことのことのことの

STANDARD CONTROL INSTRUCTIONS

HYDROGRAPHS

HYDROGRAPHS XSECTN STRCT

SUBRTN XSECTN RUNOFF RESVOR ENDATA END OF LISTING

1	999000000000000000000000000000000000000	E NO. = 1	S S	H Nowingergue A - Green Com A - Gr	IESVOR STRUCTURE	AK TIMES 16.06	SCH6 0.00 ELEV 699.00	SCH6 69.04	SCH6 3.99 ELEV 699.24	SCH6 7.13	CHG 700,99	SCH6 952:71	CHG 1830.19	
		STORM NO	34 06	1255-145 206-122 206-122 216-129-12 1253-14-1 1253-14-1 17-1952 22-70	699.00	PEAK	7 00.669 0	69.03	5.307	3 700.27		1 1081.57	1584,45/7	
	1	ָרָר בּיר בּיר בּיר בּיר בּיר בּיר בּיר בּי	AK DI SE	06RAPH 1 2 2 195 - 33 2 2 2 3 3 2 2 3 3 3 2 3 3 3 3 3 3		AK DISCHARGE	ЭБКАРН. 1 0.02 699.00	1.03	699.38	7.17	11.57	1189.57	1404.50	
		9	GES .	10.2020 11 10.4920 12 14 14 14 14 14 14 14 14 14 14 14 14 14	7.17	GES	ZERO= 1.75. 699.00	699:03	7.09 95.99	7.19/0	701.40	1261 54,5	1254.34	
	TIME INCE	:		22.22 22.22 22.23 22.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23 20.23		PŁ	99.00	1.36	7.09	7.21	119.55	1458.81 702.95	1134.00	
	2 = 113 H	TRATIONS	Faces	DELTA 1= 0.2 240.68 240.68 240.68 861.47 861.26 969.65 77.95 83.0023 63.0023		PEAK ELEVATIONS	DELTA 7= 0.2 69.173	1.54	8 69. 79 8	7.23	262.79/3	1913,69	1050.2318	
	25.	, X	· •	20 20 20 20 20 20 20 20 20 20 20 20 20 2		SMC	0,26 (.)4,01	1,72	2.03 69.063	11.00	454,15	2000 SON	702.71	
	×	•		100 100 100 100 100 100 100 100 100 100			## 11446E A	9 21:66	7.09	700.36//	702.44	3196.30/6	702.59	
	מַתְּכָּוֹ סֹלְייִ	ļ	ď	(EA = 0.5 10.25 270.25 270.25 10.25 10.45 160.05 160.05 160.05 160.05 160.05 160.05			AREA= 0.55	2,22	7.U3 699.39	7.29	762.64	50 12.50	1004.42	
			Ζ Ή	21.60 4 25.67 22 20.7 22 10.00 22 10.60 22 10.50 7 79.62 24			+ 60.000 c	50.5	611.7	57.001	10.5 nl /d	705,52	916.501	

ADDITIONS TO TABULAR DATA FOLLOW

6. 6. 6. 6.	DISCHE	322-12	374-52	735.64	204.3420	173.25	157.13	145.02	130.10 2 / 119.74	119.74	111 - 111
21.75	DISCHE	104:79	77	99.27	97.34 95.67	95.67	27:37.3		92.61 701.76	711.35	90 924 701:15
24.0	DISCHG	701.75	701.73	701.71	711.6325	65.30	59.43	54.06 701.63		731.40	40.04
	TOTAL WATER. IN INCHES	, IN INCHE	S ON DRAINAGE AREA=	GE AREA=	26.2071	CFS-	UFS-HRS= 0	502.23	ACKE*FI=		70.5.71
ENOCHP 1											

THE THE WAR

The Assessment of the Party of

7

7

SUBROUTINE RUNDFF STRUCTURE 1 90.4 TO STRUCTURE 1 10.55 TO STRUCTURE 1 1	FF CURVE= 79.0 PEAK DISCHANGE 1659.600							
PEAK TIMES 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 19.422 10.5CH6 10.5CH6	J 22.900	16.1.1	OF CONCENTRA	RATION=	U.D.	0	د	Σ
DISCHE 1022-601 1102-600 1000 1000 1000 1000 1000 1000 1000	3	s,	PE AK	RUNGER)	Sho1	7	!	
TINE RESVOR STRUCTURE 1 PEAK TIMES DISCHG 699.00 699.00 DISCHG 699.27 699.30 DISCHG 699.39 699.30 DISCHG 699.39 699.30 DISCHG 699.39 699.30 DISCHG 77.22 700.39 DISCHG 70.22 700.39 DISCHG 70.22 700.39 DISCHG 70.22 700.39 DISCHG 702.39 702.39 DISCHG 702.39 702.39 DISCHG 703.30 700.39 DISCHG 703.30 700.30 TOTAL WATER, IN INCHES ON DI	OROGRAPH 17 ER 2 2 2 0 4 1 1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	0 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	2 4 4 6 5	< ~	26 26 21 21 21 21 21 21 21 21 21 21	7.12 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40 9.40	18.42 18.42 18.42 18.42 18.42 18.42 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18.43 18	-
TINE SURFACE ELEVATION= 699.00 PEAK TIMES DISCHG 699.00 699.00 DISCHG 699.27 699.00 DISCHG 699.27 699.00 DISCHG 699.27 699.00 DISCHG 699.29 700.92 DISCHG 700.72 700.93 DISCHG 700.65 700.93 DISCHG 700.65 700.93 DISCHG 700.05 700.93 DISCHG 700.65 700.93	AINAGE AREA=	w . ~	CFS-1	-IRS=	5265 . 87	ACKE-	ડેડમ ≈1.4-	.1,
PEAK TIMES DISCHG 699.00 699.00 DISCHG 699.01 699.00 DISCHG 699.27 699.30 DISCHG 699.39 11 699.30 DISCHG 1257.60 699.30 DISCHG 707.22 707.29								
DISCHG 699.00 699.00 DISCHG 699.01 699.03 DISCHG 699.25 699.03 DISCHG 699.27 699.33 DISCHG 1257.60 1404.33 DISCHG 1257.60 1404.33 DISCHG 702.29 702.29 DISCHG 702.29 702.20 DISCHG 702.29 702.20 DISCHG 702.29 702.20 DISCHG 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76 2 701.76	PEAK DISCHARGE	s.	PEAK	ELEVAT	1008			
DISCHG 699.016 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 699.01 6	TOROGRAPH, 12ERO: 0 695.004 6	10= 3.50 0.03 699.00	0.05 699.00	.TA F= 0. 0.07 697.00	25 0.10 5 10 5 10 5 10 5 10 5 10 5 10 5 1	1.4 A I NAGE 0 0.14 6.99.00	AREA= 0.55 0.13 0.19.01	70°€. 20°€.
DISCHE 699.27 699.29 DISCHE 699.39 1 699.20 DISCHE 7007.24 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 7007.20 700	5 0.53	0.45	1.25 7	11.11	2.51	11.669	8 12.665 8 12.665	60.00 40.00 40.00
0 DISCHG 699.3911 699.00 DISCHG 706.72 706.00 DISCHG 1257.601.0 1404.00 DISCHG 701.76.29 702.00 DISCHG 701.76.21 702.00 DISCHG 701.65 701.00 DISCHG 701.05 701.00 DISCHG 701.05 701.00 DISCHG 701.05 701.00 DISCHG 701.00 D	1 699,34	699.38	7.09	7.09 694,59	0/60.2	7.09 88.669	7.03 63.469	1.03 98.99
0 DISCHG 1257.60, 1404. 0 DISCHG 1257.60, 1404. 0 DISCHG 442.21 702. 0 DISCHG 701.762. 702. 0 DISCHG 701.762. 702. 0 DISCHG 701.65. 701. 0 DISCHG 701.65 701. 10TAL WATER, IN INCHES ON	9 699,39	90.1	2,68.669	694,39	7.11	7.14	7.17,3	101.24
DISCHG 1257.60,6 1404. O DISCHG 702.29 702. D DISCHG 701.76.1 702. O DISCHG 701.76.1 701. O DISCHG 701.65 701. O DISCHG 701.65 701. TOTAL WATER, IN INCHES ON	2 700.99	701.25	26.02	79.46	164.76,5	702.12	55.9.17	705 4 . 04
0 DISCH6 702.29 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00 702.00	3 1277.12 1	031.66	973-31/7	785.51 702.58	706.64	638.74	598.5419 702.41	534.71 762.57
0 DISCH6 701.762/701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00 701.00	276.4419	230.87	195.19 701.96	162.62	158,052 0	118.36	102.80	57.42
0 DISCHG 701.65 701. 0 DISCHG 701.5124 701. 1 TOTAL WATER, IN INCHES ON	4 701.73	78.66	75.0622	71.79	54.81 701.65	66.14 701.67	701.55	701.35
0 DISCHG 701.5924 701. 10TAL WATER, IN INCHES ON	56.7924	54.79	51.60	701.68	43.582 5 701.60	59.92 701.57	35.54	35.45 761.15
TOTAL WATER, IN INCHES ON	9 25.60	701.46	701:4327	701.44	17.94	16.41	15.027.8	15.74
	DRAIMAGE AREA=	10.4189	CF S-1	-HKS=	\$696.24	ACHE-	-FT= 30°	`.` •
;	:							
F JOG 1	TR20 66J							
GATCH JOB TO MINISTE 78,300% DUARF O								
A OHEHE 10								

	FR-20 POUTTUG.																
				,							0.000000000000000000000000000000000000		0000000001 0000000000 000000000 00000000				0.15.06
					22000000000000000000000000000000000000				STURAGE 777,9998		00000000000000000000000000000000000000		10000000000000000000000000000000000000		0000 1000 1000 1000 1000 1000 1000 100		000*0
A201 . Y 0.0 .	200	ERATION LIST		3	0202020		. 340		OISCHANGE 0.0000	00.40	00000000000000000000000000000000000000	NT = 0.50	00000000000000000000000000000000000000	NT = 0.02	000000000000000000000000000000000000000	MENT = 0.50	0.0+00
5	IISU - DAIE	2	DAM	INCREMENT =	0428770		920		ELEVATION 699,0001	- DELTA T =4	00000000000000000000000000000000000000	TIME INCREME	00000000000000000000000000000000000000	TIME INCREME	0.000000000000000000000000000000000000	TIME INCREME	0.0300
ć	FOR 150	L CARO	-ELLIOT DAVIS	VELOCITY	00000000		.92	NO. 1		SS HYOROGRAPH		ABLE NO. 1		ARLE NO. 2	00000000000000000000000000000000000000	APLF NO. 5	
	HTOROLOGY PR	CUTIVE	MO DAM INSP.	C TABLE	තුකු එකු කු කු කු	20020000000000000000000000000000000000	8 9 ENDTHL	STRUCTURE N	6 ENDTRL	DIMENSIONLESS	Section of the sectio	RAINFALL TA	a a a a a a a a a a a a a a a a a a a	RAINFALL TA	20000000000000000000000000000000000000	INFALL T	50

La caracter de la caracter de

100 - Yr.

1.2200 2.3200 2.3200 2.3300 2.3300 2.3300 7.1200 3.000

ENDTRL *****

STANDARD CONTROL INSTRUCTIONS
HYDROGRAPHS
TRCT INI INS OUT DATA NO. XSECTN STRCT

001PHH OPTIDHS

0.550
0.550
0.550
0.500
0.500
0.500
0.500
0.500
0.500
0.500
0.500
0.500

SUBRIN RUNOFF RESVOR ENDATA END OF LISTING

PEAN TO THE PEAN T	T. 10000	TOUR TOUR TOUR COURT TOUR TOUR COURT TOUR CO	774 0001 3 10000	776.0000 776.0001 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	TOUR THE NOTE OF T	TOURS TOUR	TOTAL ORDER
	Tabogagagagagagagagagagagagagagagagagagag	THUE THE TEN TO THE TE	776.0001 786.0001 786.0001 9907-00001 9907-00001 9907-00001 10005-00001 10005-00001 10005-00001 10005-00001 10005-00001 10005-00001 10005-00001 10005-00001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-0001 10005-000	786.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 952.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953.0001 953	FROM THE INCREMENT = 0.25 TIME OF CONCENTRATION = 0.52 TIME OF CONCENTRATION = 0.52 TIME OF CONCENTRATION = 0.52 FRUINGE RUINGE RU	774,0001 255,0001 255,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257,0001 257	TIME OF CONCENTRATIONS TIME OF CONCENTRATIONS TIME OF CONCENTRATIONS TO


ADDITIONS TO TABULAR DATA FOLLOW

>											
19.25	DISCHG	701:48	701.74	701:12	76:33	72.38	64.65 701.6A	701.67	701.65	701.65	
21.75	DISCH6 ELEV	54.45	52.38	50.60	48.84	47.13	701.60	44.56	43,35	701.53	
000 000 000	DISCHG	701:57	38,36	35.65	32.79	30.05	701:49	765:17	23.03	21.07	
26.75	DISCHG ELEV	701.42	701.41	14.76	13.50	13.18	13.05. 7	12.91	12.78	12.65	
	TOTAL WATER, IN INCHES	IN INCH	ES ON DRAINAGE	MAGE AREA=	1,8151	CFS	FS-HRS=	62.449	ACKE-FT=		05.24

ENDCHP 1

IOSKINS-WESTERN-SONDEREGGER	COMPU	TED BY <u>&&</u>	DATE O	13/79	SHEET NO. 1	3005
CALCULATIONS FOR	et		PROJECT_			· .
Drop Inlet	رهت ۱ ۱ و	,	<i>F</i>	$V_{in} + \Gamma$	Povis Jam	= ,,,,.
			7	7707	0712 271	
Carranete Box ou		30"CA	1 0			
			77			
-Antiverted	9000			+	699 II	Elev.
		F		2"		1-1
PC Box a S A			 			
		7	EMP			
39 /						31
est. 8" + >					0=65	7
						1
				1_		
			4			
· Crest length = 4x	(30	= 12	ر <u>+</u> ا ۵	10 4-	1	
C = 35 + rom		of 5	440	J. Chan.	of Pas Jus	Let up ==
699+ h	9	4				
	1	+				
2	3	 				
-	9	+++-			+-+-+	
	16	+++				
	35	+++	 		+	
	99	+				
~ =	38	+++-		+	+	
	82	+++-		+ + + + + + + + + + + + + + + + + + + +	+	
	00	+++		++++	+	
4 D 2 3	8 o 9 1	+++		+++-	+	
		 		+++	 	++++
				 	+ + + + + + + + + + 	
				+++		
-		+ + + +		1 1 1		
					•	
~		+ + + +		+		
		+				1
-		++++		 	++++++	1 1 1
		+++-				- 10
	 	+++++			120	F 16
						

これの 本間ののでは、一般などのないのであるのであるとのできましている。

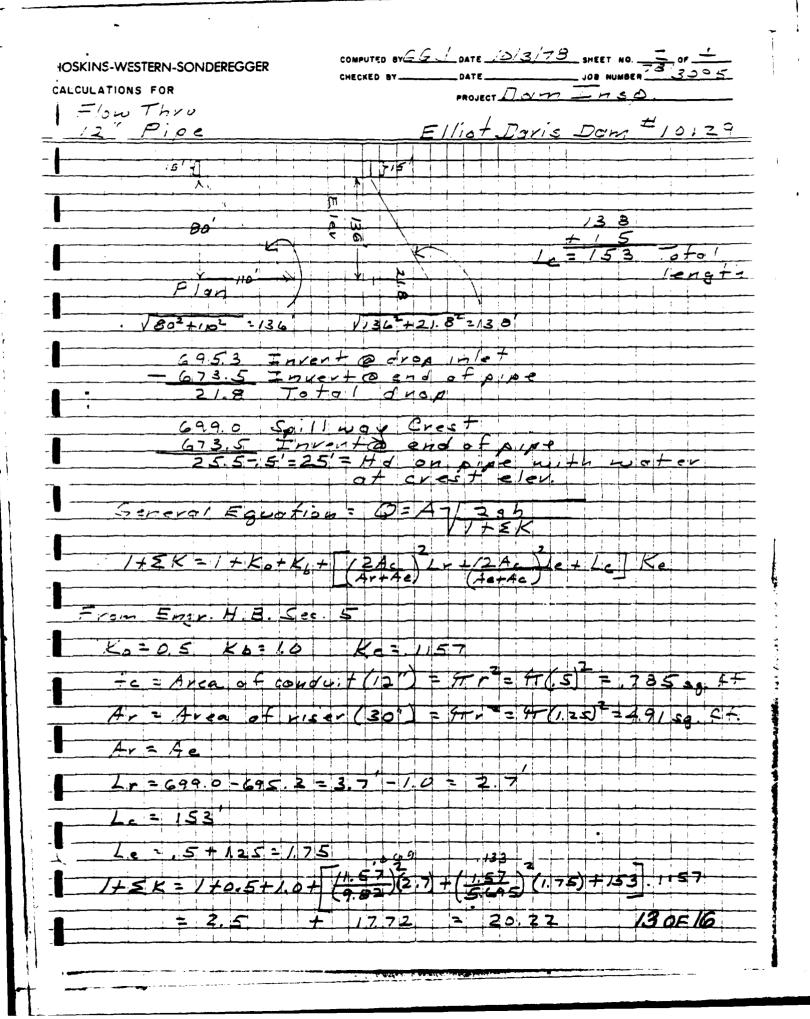

NOSKINS-WESTERN-SONDEREGGER CALCULATIONS FOR PROJECT_ Flow thro 20.22 Eler. hu 7,06 27.0 7.34 3.0 702 28.0 7.41 703 40 30.0

Collations for FROMET FROMET FROMET Collations	SKINS-WESTERN-SONDEREGGER	COMPUTED BY	DATE	SHEET NO:	_ or
# 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 1	_CULATIONS FOR	CHECKED BY		JOB MUMBER	
# 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 10129 # 1	Flow over Emband	kment	PROJECT		
	Q=Cbh3/2			# 10	/29
6	Use	TMRT, BK. B.	CH. A-5		
### ### ##############################	5+0 0 5+ 0	01700400	LM C-III	Mana d	++-
702022 22 225 300 7013 130 0 7013 22 0 0 7013 2 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0			h	Allis Grarel	
702022 22 225 300 7013 130 0 7013 22 0 0 7013 2 2 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0		42			
7020 22 225 1 3,00 /0 /2 1		4.2 7060			
			14415	<u> </u>	1 131
7		7020 22	╼╂╼╁═┾═╁╾	╽╶╎ ╏╸╏╸╏╸╏╸	
2 + 0 0			1225	1 3.00	11912
2+00		1701.91-2.3	+++++	+	┨┤ ┪┪
3 + 00		1 707 8 1/1		 	
3 + 00		1 1 1 2 2 1 2 1 1 7		1 1 1 2 2 2	1122
		703011		+++++	17799
704.1 . // 25			11/2/2	1 1 2 7 2	1 /1/2
5+00		704.1	11111	1 1 1 5 1 5	4 + + + + + + + + + + + + + + + + + + +
5+00	100		1.25	260	3 3 3
G + O		703.8 14			
7 + 0 0			. 7	2.75	161
7 + 0 0		703.2			
			1.05	2.34	306
8+00 100 100 100 100 100 100 100		703.1			
70/.5 27 3.04/463 10+00 50 70/.2 3.0 2.45 3.02 57? 10+50 2.45 3.02 57? 110+50 2.45 3.02 57? 110+50 3.04 2.70 2.2 0 3.0 2.5 7? 110+50 3.04 2.70 2.2 0 3.0 2.5 7?			11/10	203	293
701.5 2.7 10+00 50 701.2 3.0 245 3.0 2 577 702.3 1.9 .75 .282 63 .704.2 704.2 0 (3.0)		7033 . 9		┦╸╎┊ ┦╌┤╤┤╤┤╒	┩┥
70/.2 3.0 2 5 79 10+50 3.0 4 746 3 70/.2 3.0 2 5 79 10+50 3.0 4 7042 0 3.0 2 6 3 41+60 7042 7062 0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3.0 3			1.9	1 2 9 4	3 7/5
70/.2 3.0 2.45 3.02 577 702.3 /.9 			1201		1 // /
50 702,3 1,9 704,2 706,2 0 (3,0) (3,0) (3,0) (3,0)		70/2/3/2	6.03	1 1 3 3 4	7/4/2/3
702.3 /.9	50		245	1 1 3 0 7	1 2 7 3
	101450	702.3 1.9			1 3 4 4
	30		195		63
	A1160 70	42 7062 0			
		(3.0			611
	├─┼╶ ┼╶┼╌╂┈┼┈╁				
	╞┊┊┊ ╅╅╃╂┽╃╃╃	╒╇╊╁┼┼┼╂┤┼┤	_	 	1 1 1 1
	┊ ┼┼┼╂╂┼┼╂╂┼	╼┾╂┼┼┼┼┼┼┼┼	╶╂╌┼╌ ┼╌╂╌╵		++++
	┆╸┆╸╽╸╽╸┫ ╸ ╏╸╏╸╏╸	╒ ╇ ╒ ╋╌┼╌┼╌╂╌╂╌╂╌╂		├ ┼┼╁┼	╂┼┼┼
	┆╸┆╸┆╸┞╸╂╸┫╶╿╸┩ ╶ ╏╸	┍╇╼╋╼╂ ╾╂╾╂╾╂╾┼ ┈┤		├╶├ ╌ ┠ ╌ ┞	++++
	┆┊┆┆╏╏╏	╒ ┼ ╸┠┈╏╸╏╸╏	- 	├─┼─<mark>╏</mark>╌╎ ─┼─	++++
		╒┾╌╂╌┼╌┼╌┼╌╂╌┟╌┼╌┤	- - - - - - - - - - 	; 	╂╼┼╌┼
	* 	╒┋┋		 	}
			1 1 1 1 1		1
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1			- 1 -1-1-1-1		†

KINS, WESTERI	N-SONDEREC	3GER	CHECKED BY_	DAT	£	SOMING COL	78/3095
ULATIONS FO	R			PROJ			
- /	, ~ ,	Flow E	, .				
	· / フッテ:	- ow &	7770	<u>= //</u>	110+ Do	Vis #	10129
+ + + + + + + + + + + + + + + + + + + +	+++-						
Eler.	+		++++	+	 		
= 1e/.		Ou.	04		QTo-	#41	
699 2	2	+++++++++++++++++++++++++++++++++++++++		+ + + -	++++	++++	
4		3./	7	++++	++++	3.1	
+ + + + + + + + + + + + + + + + + + + +	. 6	++-	7.1	+	 	7. /	-
700	1,0	7 97	7.1	++++	 	7. /	-
740,5	1.5	+ + + + +	72	+ + + + + + + + + + + + + + + + + + + +		7.2	
701	20	 	73	+ 	 	7.3	
701.	1519	 	73			7.3 La	at an Dam
70/4		! ! ! ! ! !	7, 3	6		13.3	
70116			7.4	36		43.4	
7≎/, €			7.4	96		03.0	
-702,2			7.4	320		27.0	
702.7			7. 4	721	92	280	
703.2			7.5	1929	193	370	
-704.2			7.5	6113	613	21.0	
						1 1 1	
					 		
++++	++++						
		+++++					
	- - - 				┾┼┼		
	++++	+++++					
		┼┼┼┼┼┼	- 		┾╍┾╍┾╍┾╍		
++++		+ + + + + +		++++	+ + + + +		
	++++	++++	- - - - - - - - - - 	++++	 	++++	
	+ + + + + + + + + + + + + + + + + + + +		+++	+++		+++++	
		<u> </u>	++++	++++	+ + + +		
	\top	 	+++	++++		 	-++-
		1 1 1 1 1					137
						++++	
	 	 					
+							
	++++	4				•	
		 		++++			
		 				+++++	
		++++		+++-	++++	++++	
- 	++++	++++			++++	+++++	16 45 15
	_+-	<u>i i l l l i</u>	<u> </u>	<u> </u>			16 OF 16

TO SECTION AND ASSESSMENT

END

DTIC